



**CUSTOM QUALITY
PRODUCTS, INC.**

STRIP DOORS

-  **PVC STRIP DOORS**
-  **BULK PVC**
-  **LOW TEMP**
-  **CUSTOM HARDWARE**



1645 Blue Rock St. • Cincinnati, OH 45223
Phone: (513) 541-1191 • Fax: (513) 541-1192 • Toll Free: (800) 635-1086
Email: sales@cqpinc.com • Website: www.cqpinc.com


STRIP DOORS, BULK PVC



Custom Quality Products is a leading manufacturer of an extensive line of PVC strip doors, barriers and custom hardware for these products.



We have been in the business of manufacturing strip doors for 19 years and our sales staff has the experience to help you select the proper product for each application.

We offer three grades of material – standard, low temperature and extra low temperature. In the standard and low temp grades we offer a ribbed material which was developed to reduce damage to the strip and to help maintain the clarity of the product.

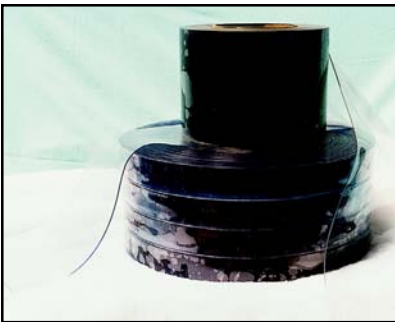

Our low temp and extra low temp materials are ideal for freezer applications. These materials meet USDA and FDA regulations for meat packing, poultry and dairy industries. Extra low temperature material is rated at -70°F.

Our extensive line of PVC strips also includes a variety of widths and thicknesses as well as safety orange to outline the opening. We offer weld screen material which is designed to protect personnel by screening out dangerous UV rays and light.

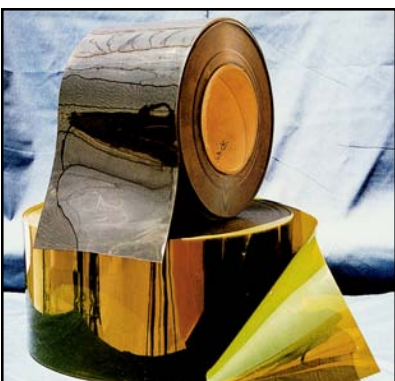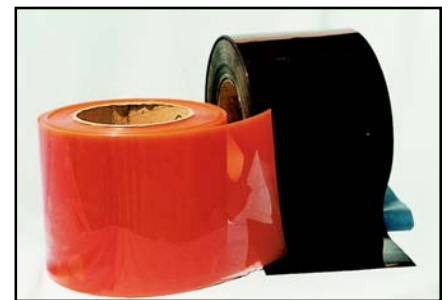

Extra thick and extra wide materials are also available. Wide strip material can be used as panels for traffic doors (manufactured by Custom Quality Products, Inc.). Also, these wide panels can be used as replacements for automated bi-fold doors.

SIZE AND SPECIFICATIONS

TYPE	PART #	DIMENSIONS IN INCHES		ROLL LENGTH IN FEET	WEIGHT IN POUNDS
		WIDTH	THICKNESS		
STANDARD 0°F to 150°F					
Smooth	0406STND	4"	.060	400'	55
	0606STND	6"	.060	400'	75
	0808STND	8"	.080	300'	100
	1208STND	12"	.080	300'	150
	1212STND	12"	.120	200'	150
	1616STND	16"	.160	150'	200
Ribbed	0807STRB	8"	.072	150'	56
	1211STRB	12"	.110	150'	117
	1614STRB	16"	.145	150'	202
Sheet	4804STND	48"	.040	150'	150
	4808STND	48"	.080	120'	240
	4812STND	48"	.120	90'	280
	4816STND	48"	.160	60'	240
	4825STND	48"	.250	60'	375
	4837STND	48"	.375	60'	540
LOW TEMPERATURE -30°F to 150°F					
Smooth	0606LTUR	6"	.060	400'	75
	0808LTUR	8"	.080	300'	100
	1212LTUR	12"	.120	200'	150
	1616LTUR	16"	.160	150'	200
Reinforced	0606LTRE	6"	.060	400'	75
	0808LTRE	8"	.080	300'	100
	1212LTRE	12"	.120	200'	150
Ribbed	0807LTRB	8"	.072	150'	56
	1211LTRB	12"	.110	150'	117
	1614LTRB	16"	.145	150'	202
EXTRA LOW TEMPERATURE -65°F to 150°F					
Smooth	0808XLTM	8"	.080	300'	100
	1212XLTM	12"	.120	200'	150
SAFETY ORANGE 0°F to 150°F					
Smooth	0808STOR	8"	.080	300'	100
	1212STOR	12"	.120	200'	150
	1616STOR	16"	.160	150'	200
Ribbed	1212RBOR	12"	.110	150'	117
BLACK OPAQUE 0°F to 150°F					
Smooth	0808STBK	8"	.080	300'	100
WELD SCREEN 0°F to 150°F					
Smooth	0808WELD	8"	.080	300'	100
	1212WELD	12"	.120	200'	150
Sheet	4808WELD	48"	.080	120'	240
ANTI STATIC 0°F to 150°F					
Smooth	0808ASTA	8"	.080	300'	100
	1212ASTA	12"	.120	200'	150
Sheet	4804ASTA	48"	.040	150'	150

This chart shows the most common sizes. If there is a size or specification not listed, please call Custom Quality at 1-800-635-1086.